




Traffic Management

COM HUB | EDGE DEVICE

**Synchronization and fusion
of up to 6 sensors**

Data collection & storage

**Ethernet and PLC
communication**

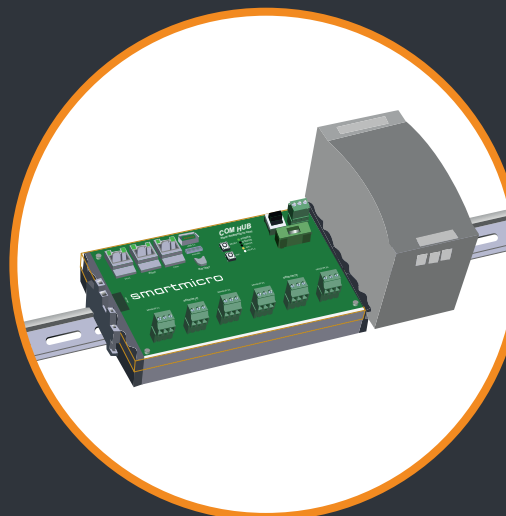

**Expandable platform, i.e. for
V2X applications**

**Big data for central software
solutions**

Remotely accessible

	COM HUB Sync PLC
FEATURES	
	Built-in surge- and power protection
	Three Ethernet interfaces for external modules, i.e. SDLC, V2X Module
	WIFI communication
	Up to 6 sensors
	SD card and USB 3.0
	Passthrough of MPEG video stream
	Real-time clock
	Pluggable terminal blocks for power and data interfaces
	Status and activity LEDs for all interfaces
	Time and acquisition synchronisation
	Seamless tracking / Fusion tracking
	Hybrid video and radar detection / Fusion tracking
MECHANICAL	
Weight	2305 g / 81.3 oz
Dimensions	500 x 125 x 126 mm / 19.7 x 4.9 x 5 in
GENERAL	
Operating Temperature	-40...+71°C / -40°..+160°F
Operating Voltage / Power Supply	48 V
Interfaces	HD PLC
AVAILABLE ACCESSORIES	
	SDLC Module
	PLC J-Box

